ESL8012A2 Pin-Schottky Diode Limiter

8.0-12.0 GHz Octave Band





Technical Characteristics

Product Features

Power Handling: 1 watt CW, 100W peak power

(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)

Internal DC block

Fast recovery time - 200 uSec typ.

Limiting threshold above +4dBm typ. & low typical output leakage

ow insertion loss

Maximum Ratings

Storage Temperature	65° to +125°C
Operating Temperature	55° to +90°C
May Innut Power	+2 watte CW 100 watte no

Product Export Classification

ECCN: EAR 99 (unless otherwise specified)


HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	8.0 to 12.0		1.6		dB
VSWR	8.0 to 12.0		1.6:1		-
Leakage Power (CW)	8.0 to 12.0			+14	dBm CW
				+19	dBm Peak
Operating Temperature		-55		+90	° C

Outline drawing

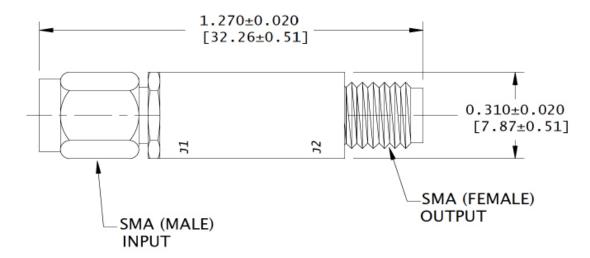

Notes:

- 1. Limiter has an internal DC block.
- 2. Typical values are measured at +25°C and are not guaranteed.

Quality products that serve the industry. Today and tomorrow.





